



1. Mechanical Dimensions (mm) :

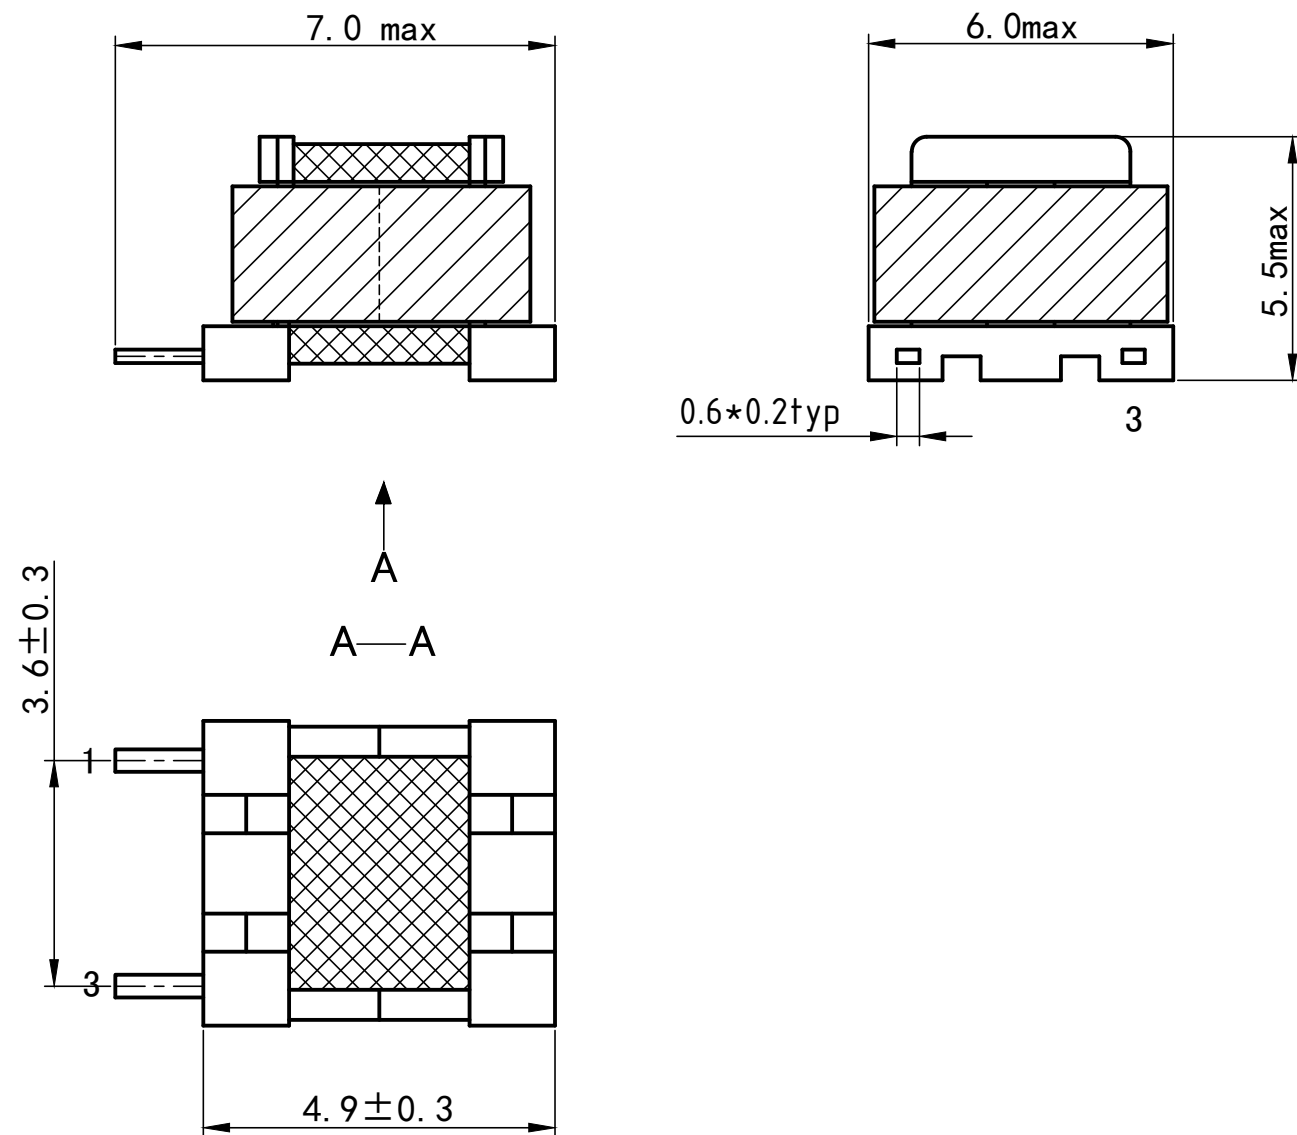

Notes:

- 1). Cut Pin 2. 4. 5. 6, Put white dot on Pin 1
Pin 1.3 need a trim to be less than 7mm in length
- 2). Varnish the assembly
- 3). Insulation system: Class B 130°C
- 4). Storage temperature: -10°C to 40°C
- 5). Operating temperature: -40°C to 125°C
- 6). Electrical and mechanical specifications 100% tested
- 7). RoHS compliant compatible

2. Schematic:

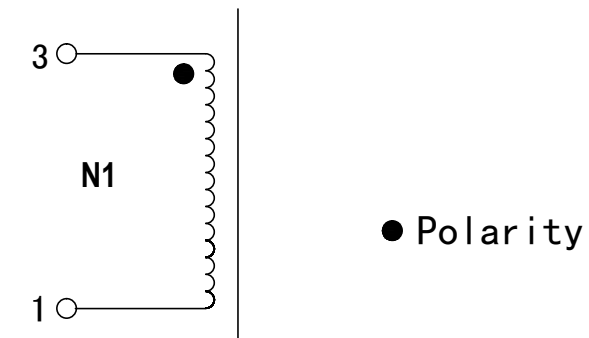

Item	Wire	Pin(S)	Pin(F)	Turns	Tapes	Method
N1	2UEW/F 0.25mm*1P	3	1	REF	2	Tight

3. Electrical Specifications: @20°C

- 1) OCL: Pins (3-1) = 12uH ± 5% @ 1kHz, 0.25V
- 2) DCR: Pins (3-1) = 0.09 Ω max

				Title:	
				High Frequency Transformer	
				CUSTOMER P/N.	TR201
				OUR P/N.	LF-EE050200-001R
A1	Design	2018-03-08	Musk Yi		
REV	DESCRIPTION	DATE	APPROVED		

PROPRIETARY