



1. Mechanical Dimensions (mm) :

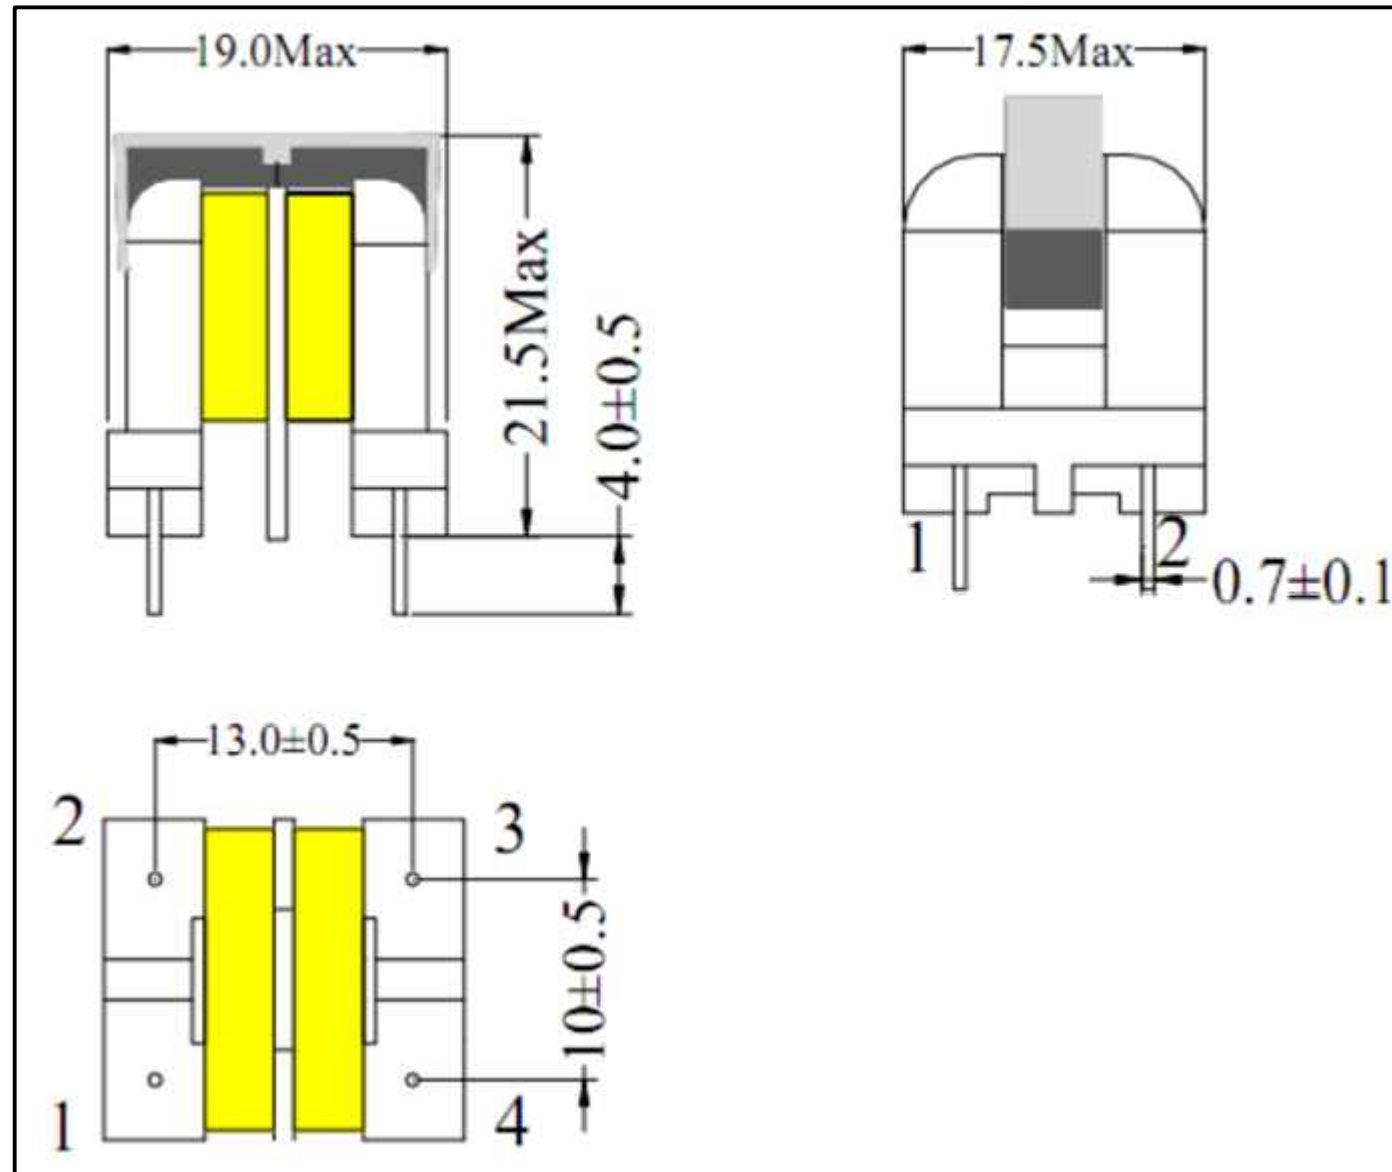

2. Schematic:

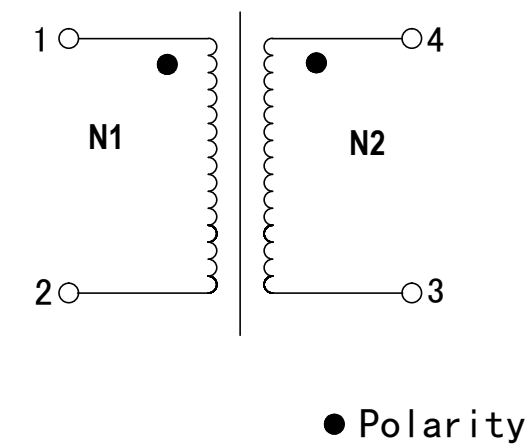


3. Electrical Specifications: @20°C

- 1). Rated current: 1.0A
- 2). Rated voltage: 300V
- 3). OCL: Pins (1-2/4-3) = 5.0mH ± 20% @ 1kHz, 0.25V
- 4). Temperature rise: 60K max
- 5). Insulation Resistance:
(1+2) to (4+3) DC500V 100MΩ min

Notes:

- 1). Insulation system: Class B 130°C
- 2). Storage temperature: -20°C to 60°C
- 3). Operating temperature: -40°C to 85°C (including temp rise)
- 4). Electrical and mechanical specifications 100% tested
- 5). RoHS compliant compatible

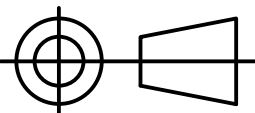				Title: Common Mode Choke	
				CUSTOMER P/N.	UU10.5LF-552-LF
				OUR P/N.	LF-UU110500-018R
				 THIRD ANGLE PROJECTION	
A1	Design	2018-08-22	Musk Yi		
REV	DESCRIPTION	DATE	APPROVED		

PROPRIETARY