


# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS


## ● Taping Specifications for Chip Type Capacitors

### ● Carrier Tape

• Fig.1

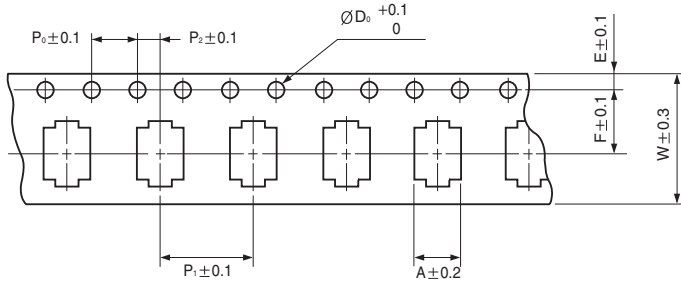

• Fig.2

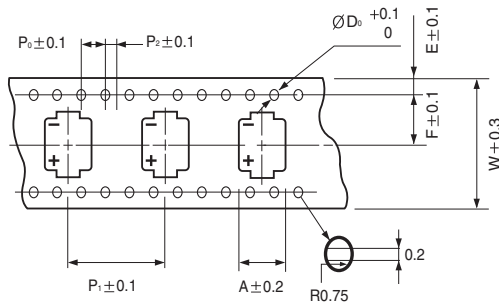

ØD×L	A	B	ØD <sub>0</sub>	E	F	P <sub>0</sub>	P <sub>1</sub>	P <sub>2</sub>	t <sub>1</sub>	t <sub>2</sub>	W	Fig.	
4 × 5.3	4.7	4.7	1.5	1.75	5.5	4.0	8.0	2.0	0.4	5.7	12.0	1	
5 × 5.3	5.7	5.7	1.5	1.75	5.5	4.0	12.0	2.0	0.4	5.7	12.0		
6.3 × 5.3	7.0	7.0	1.5	1.75	7.5	4.0	12.0	2.0	0.4	5.7	16.0		
6.3 × 5.8	7.0	7.0	1.5	1.75	7.5	4.0	12.0	2.0	0.4	6.3	16.0		
6.3 × 7.7	7.0	7.0	1.5	1.75	7.5	4.0	12.0	2.0	0.4	8.2	16.0		
8 × 6.2	8.7	8.7	1.5	1.75	7.5	4.0	12.0	2.0	0.4	6.8	16.0		
8 × 10	8.7	8.7	1.5	1.75	11.5	4.0	16.0	2.0	0.4	11.0	24.0		
10 × 10	10.7	10.7	1.5	1.75	11.5	4.0	16.0	2.0	0.4	11.0	24.0		
12.5 × 13.5	14.0	14.0	1.5	1.75	14.2	4.0	24.0	2.0	0.5	14.0	32.0		2

### ● Reel

Fig.1(PAPER)



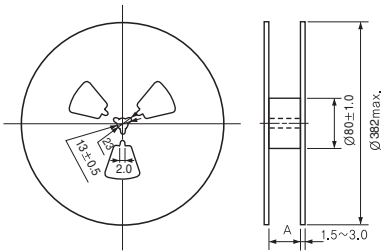


Fig.2(PLASTIC)

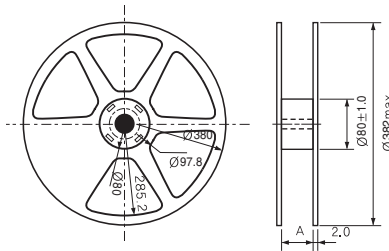


### ● Polarity



ØD×L	A	
	Fig.1	Fig.2
4 × 5.3	14	-
5 × 5.3	14	-
6.3 × 5.3	18	-
6.3 × 5.8	18	-
6.3 × 7.7	18	16
8 × 6.2	18	-
8 × 10	26	24
10 × 10	26	24
12.5 × 13.5	34	32

ØD×L	Q'ty/Reel(pcs.)	Q'ty/Box(pcs.)
4 × 5.3	2000	20000
5 × 5.3	1000	10000
6.3 × 5.3	1000	10000
6.3 × 5.8	1000	10000
6.3 × 7.7	900	9000
8 × 6.2	1000	10000
8 × 10	500	3000
10 × 10	500	3000
12.5 × 13.5	200	1000

### ● Recommended Land Size



Type	ØD×L	X	Y	Z
VR	4 × 5.3	1.6	2.6	1.0
	5 × 5.3	1.6	3.0	1.4
	6.3 × 5.3	1.6	3.5	2.0
	6.3 × 5.8	1.6	3.5	2.0
	6.3 × 7.7	1.6	3.5	2.0
	8 × 6.2	2.5	4.0	2.0
	8 × 10	2.5	3.5	3.0
	10 × 10	2.5	4.0	4.0
	12.5 × 13.5	2.5	5.7	4.0
	VG	6.3 × 7.7	3.0	4.0
8 × 10		4.3	5.3	2.0
10 × 10		4.3	5.6	3.3
12.5 × 13.5	7.0	7.3	3.0	