


Produktübersicht: PowerBurst Zellen und Module von TECATE

CapComp GmbH - Reichbergstr. 38/1 - D-74385 Pleidelsheim
 www.capcomp.de - Tel: +49 7144/858535




Stand 01.01.2015

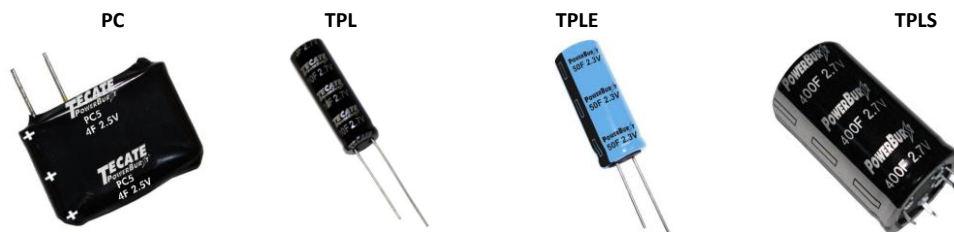

Tecate PowerBurst Cells, Ultracapacitors

| Cells | Voltage | Capacity | Temperature | | Download |
|-------|---------|------------|-------------|--|---------------------|
| Type | Volt | Farad | °C | Discription | Datasheet |
| PC | 2,5 | 4 - 10 | -40 to +70 | Prismatic Package, Hermeically sealed | PDF |
| TPL | 2,7 | 0,33 - 100 | -40 to +65 | General purpose, radial lead, Ultracapacitor cells, UL recogniezed | PDF |
| TPLE | 2,3 | 5 - 100 | -40 to +85 | Extended Temperature raial lead Ultracapacitor cells | PDF |
| TPLS | 2,7 | 100 - 400 | -40 to +85 | Snap-in lead Ultracapacitor cells UL recognized | PDF |

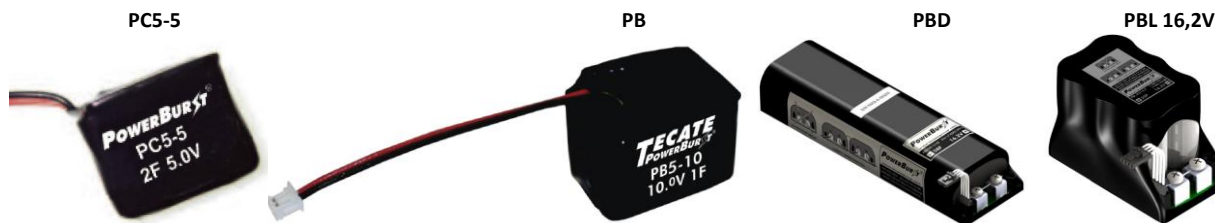

Tecate PowerBurst Modules, Ultracapacitors

| Module | Voltage | Capacity | Temperature | | Datasheet |
|-------------|-------------|--------------|-------------|---|---------------------|
| Typ | Volt | Farad | °C | Discription | PDF |
| PC5-5 | 5 | 2 | -40 to +70 | Actively balanced ultracapacitor module | PDF |
| PB active | 7,5 to 25 | 0,4 to 1,33 | -40 to +70 | Actively balanced ultracapacitor modules with leads and connector | PDF |
| PB passive | 5 to 25 | 0,4 to 2 | -40 to +70 | Passively balanced ultracapacitor modules with leads and connector | PDF |
| PBD | 16,2 | 58 | -40 to +65 | Replacement for Maxwell PBAK0058 and BMOD0058, Rugged fully enclosed systems with screw terminal | PDF |
| PBL 16,2V | 16,2 | 25 | -40 to +65 | Actively balanced 16,2V ultracapacitor modules | PDF |
| PBL 5,4V | 5,4 | 0,25 to 15 | -40 to +65 | Passively balanced ultracapacitor modules | PDF |
| PBLE | 4,6 | 2,5 to 12,5 | -40 to +85 | Externded temperature passively balanced ultracap modules | PDF |
| PBLL Passiv | 5,4 | 0,25 to 12,5 | -40 to +65 | Passively balanced ultracapacitor mudule with leads and connector | PDF |
| PBLL Active | 5,4 | 2 to 5 | -40 to +65 | Actively balanced ultracapacitor module with leads and connector | PDF |
| PBLLE | 4,6 | 2,5 to 12,5 | -40 to +85 | Externded temperature passively balanced ultracap modules with leads and connector | PDF |
| PBLS | 8,1 to 16,2 | 1,6 to 16,66 | -40 to +65 | Unice slim profile design ultracapacitor module with on-board thermistor and Molex 87439-0400 connector | PDF |
| TC | 2,7 | 7,2 to 9,6 | -40 to +65 | Slim profile, low ESR ultracapacitor module with JST ZHR-2 quick connect | PDF |

