

Series AZ(U) - 105°C - 5.000 h


Capacitors screw terminal type -High Reliability

- AZX Flat Bottom
- AZUX Mounting Stud
- Capacitance Tolerance: -20 + 20% - standard (M)
- Capacitance Tolerance: -10 + 30% - on request (X)
- Climatic category: 40/105/86
- Case: 51x83 - 90 x 222
- Temperature - 40°C + 105°C
- All welded construction reliable electrical contact

Mechanical Outlines

- Case: aluminium made
- Terminals: screw
- Sealing: hermetic by EPR gasket, on a resin cover
- Pressure Release Vent: silicone-rubber
- Sleeve: self-extinguishing thermo shrinkable
- Size: see enclosed drawings
- Mounting Hardware: see hardware section
- External Material UL94-V0

Ordering Code: Example

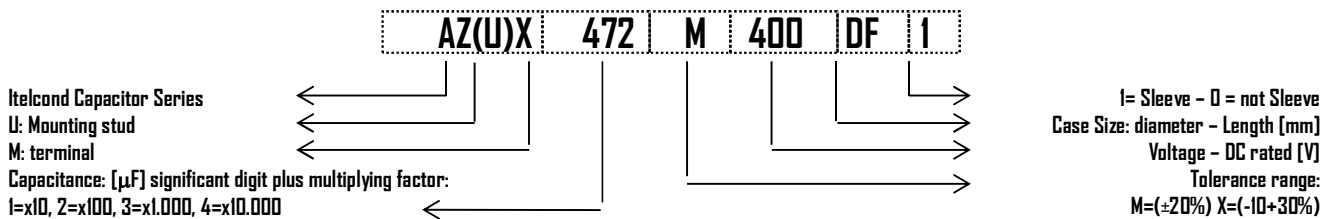

Ripple Current

The allowable values of ripple current in Ampères, are related to the temperature and frequency by following equation:

$$I_{\text{Ripple}} = K_t \cdot K_f \cdot I_{\text{Ripple}@105^\circ\text{C}}$$

Where:

- $I_{\text{Ripple}@105^\circ\text{C}}$ is the limit given by tables, @ 105°C/100HZ
- K_t is the Temperature Correlation Factor
- K_f is the Frequency Correlation Factor

Note .Superimposed alternating voltage summed to DC volage must not exceed rated voltage, rated ripple current must not be exceeded and no reverse polarity is allowed

°C	40	55	65	75	85	95	105
K_t	2.50	2.40	2.20	2.00	1.80	1.30	1.00

Table 1- K_t Values

Hz	K_f
50	0.78
100	1.00
120	1.02
200	1.06
300	1.08
400	1.09
500	1.32
>1000	1.37

Table 2- K_f Values

Expected Lifetime End of Life Criteria

During useful life typical electrical parameters of electrolytic capacitor are subject to change.

End of Life criteria, when rated temperature, voltage and ripple are applied, are:

$$\frac{\Delta C}{C_{t0}} \leq 30\% \quad \text{Equation 1}$$

$$ESR \leq 3 \cdot ESR_{t0} \quad \text{Equation 2}$$

$$I_f \leq I_{ft0} \quad \text{Equation 3}$$

where t_0 is the initial value

Voltage Endurance Test Requirements

On Voltage Endurance Test are based Expected Lifetime Curves.

End of Life criteria, when rated temperature, and voltage are applied for 2'000hrs, are

$$\frac{\Delta C}{C_{t0}} \leq 20\% \quad \text{Equation 4}$$

$$ESR \leq 1,3 \cdot ESR_{t0} \quad \text{Equation 5}$$

$$I_f \leq I_{ft0} \quad \text{Equation 6}$$

where t_0 is the initial value

Expected Lifetime Vs Temperature and Ripple Current

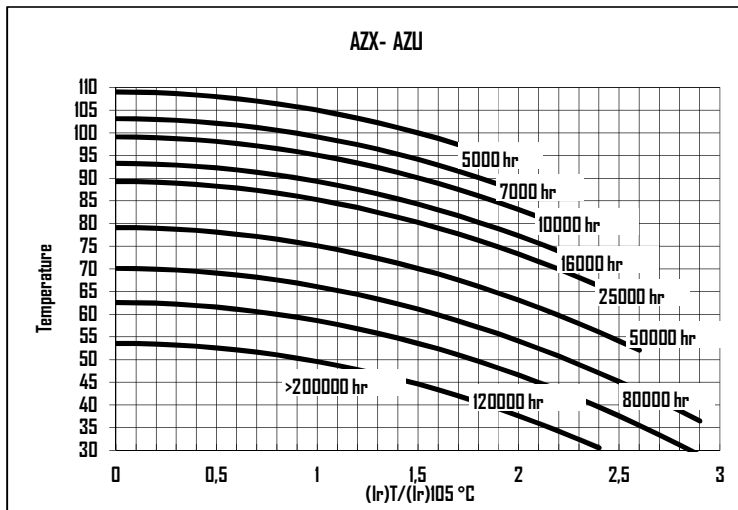


Table 3

Leakage Current

After the rated voltage has been applied to the capacitor for 5 minutes the leakage current must be within those limits.

Maximum limit	@25°C	$I_f \leq 0,004 \cdot C \cdot V$
Operating limit	@25°C	$I_f \leq 0,001 \cdot C \cdot V$


Where: I_f =leakage current [μ A], C =capacitance [μ F],
 V =rated voltage [V]

Surge Voltage

Working Voltage	200	250	350	400	450
Surge Voltage	230	290	385	440	495

	Capacitance	Case	Diam	Height	Tanδ	ESRmax typ		Zmax	Iripple @100Hz		Ordering Code
	[μF]@100Hz		[mm]	[mm]	[%]@100Hz	[mΩ]@100Hz	[mΩ]@10KHz	[A]@55°C	[A]@105°C	(U) for mounting stud	
200	2220	BC	51	105	0,09	65	49	61	10,0	5,4	AZ(U)X222M200BCI
	3300	CC	63	105	0,09	43	33	40	13,0	7,5	AZ(U)X332M200CCI
	4700	DC	76	105	0,09	30	23	28	18,0	10,0	AZ(U)X472M200DCI
	6800	DF	76	145	0,09	21	16	18	25,0	13,7	AZ(U)X682M200DFI
	10000	DF	76	145	0,09	14	11	13	30,0	16,6	AZ(U)X103M200DFI
250	2220	BC	51	105	0,09	65	52	49	10,8	6,0	AZ(U)X222M250BCI
	3300	BC	51	105	0,09	43	35	33	13,2	7,3	AZ(U)X332M250BCI
		CC	63	105	0,09	43	35	33	15,0	8,3	AZ(U)X332M250CCI
	4700	DC	76	105	0,09	30	24	23	19,9	11,0	AZ(U)X472M250DCI
		DF	76	145	0,09	30	24	23	22,8	12,7	AZ(U)X472M250DFI
	6800	DF	76	145	0,09	21	17	16	27,4	15,2	AZ(U)X682M250DFI
	10000	DF	76	145	0,09	14	11	11	33,3	18,5	AZ(U)X103M250DFI
		DJ	76	222	0,09	14	11	11	40,1	22,3	AZ(U)X103M250DJI
	15000	DJ	76	222	0,09	10	8	7	49,1	27,3	AZ(U)X153M250DJI
EF		90	145	0,09	10	8	7	44,8	24,9	AZ(U)X153M250EFI	
22200	EJ	90	222	0,09	7	5	5	65,2	36,2	AZ(U)X223M250EJI	
350	1500	BC	51	105	0,07	74	59	56	10,1	5,6	AZ(U)X152M350BCI
	2220	CC	63	105	0,07	51	41	38	13,9	7,7	AZ(U)X222M350CCI
	3300	CC	63	105	0,07	34	27	25	17,0	9,4	AZ(U)X332M350CCI
		DC	76	105	0,07	34	27	25	18,9	10,5	AZ(U)X332M350DCI
	3900	DC	76	105	0,07	29	23	21	20,5	11,4	AZ(U)X392M350DCI
	4700	DC	76	105	0,07	24	19	18	22,5	12,5	AZ(U)X472M350DCI
		DF	76	145	0,07	24	19	18	25,9	14,4	AZ(U)X472M350DFI
	5600	DF	76	145	0,07	20	16	15	28,2	15,7	AZ(U)X562M350DFI
	6800	DF	76	145	0,07	16	13	12	31,1	17,3	AZ(U)X682M350DFI
		DJ	76	222	0,07	16	13	12	37,5	20,8	AZ(U)X682M350DJI
	8200	DF	76	145	0,07	0	0	0	0,0	0,0	AZ(U)X822M350DFI
	10000	DJ	76	222	0,07	11	9	8	45,4	25,2	AZ(U)X103M350DJI
EF		90	145	0,07	11	9	8	41,5	23,0	AZ(U)X103M350EFI	
15000	EJ	90	222	0,07	7	6	6	61,0	33,9	AZ(U)X153M350EJI	
400	680	BC	51	105	0,07	164	131	123	6,8	3,8	AZ(U)X682M400BCI
	1000	BC	51	105	0,07	111	89	84	8,2	4,6	AZ(U)X102M400BCI
	1500	BC	51	105	0,07	74	59	56	10,1	5,6	AZ(U)X152M400BCI
	2220	CC	63	105	0,07	51	41	38	13,9	7,7	AZ(U)X222M400CCI
		DC	76	105	0,07	51	41	38	15,4	8,6	AZ(U)X222M400DCI
	3300	DC	76	105	0,07	34	27	25	18,9	10,5	AZ(U)X332M400DCI
		DF	76	145	0,07	34	27	25	21,7	12,0	AZ(U)X332M400DFI
	3900	DF	76	145	0,07	29	23	21	23,6	13,1	AZ(U)X392M400DFI
	4700	DF	76	145	0,07	24	19	18	25,9	14,4	AZ(U)X472M400DFI
	5600	DF	76	145	0,07	20	16	15	28,2	15,7	AZ(U)X562M400DFI
6800	DF	76	145	0,07	16	13	12	31,1	17,3	AZ(U)X682M400DFI	

	Capacitance	Case	Diam	Height	Tanδ	ESRmax typ		Zmax	Iripple @100Hz		Ordering Code
	[μF]@100Hz		[mm]	[mm]	[%]@100Hz	[mΩ]@100Hz		[mΩ]@10KHz	[A]@55°C	[A]@105°C	(U) for mounting stud
400	6800	DJ	76	222	0,07	16	13	12	37,5	20,8	AZ(U)X682M400DJ
	10000	EF	90	145	0,07	11	9	8	41,5	23,0	AZ(U)X103M400EF
		DJ	76	222	0,07	11	9	8	45,4	25,2	AZ(U)X103M400DJ
	15000	EJ	90	222	0,07	7	6	6	61,0	33,9	AZ(U)X153M400EJ
450	1000	BC	51	105	0,08	127	102	96	7,7	4,3	AZ(U)X102M450BC
	1500	CC	63	105	0,08	85	68	64	10,7	5,9	AZ(U)X152M450CC
	2220	DC	76	105	0,08	58	46	43	14,4	8,0	AZ(U)X222M450DC
		DF	76	145	0,08	58	46	43	16,5	9,2	AZ(U)X222M450DF
	3300	DF	76	145	0,08	39	31	29	20,3	11,3	AZ(U)X332M450DF
	3900	DF	76	145	0,08	33	26	24	22,0	12,2	AZ(U)X392M450DF
	4700	DF	76	145	0,08	27	22	20	24,2	13,4	AZ(U)X472M450DF
	5600	DF	76	145	0,08	23	18	17	26,4	14,7	AZ(U)X562M450DF
	6800	DJ	76	222	0,08	19	15	14	35,1	19,5	AZ(U)X682M450DJ
		EF	90	145	0,08	19	15	14	32,0	17,8	AZ(U)X682M450EF
	10000	DJ	76	222	0,08	13	10	10	42,5	23,6	AZ(U)X103M450DJ
10000	EJ	90	222	0,08	13	10	10	46,6	25,9	AZ(U)X103M450EJ	

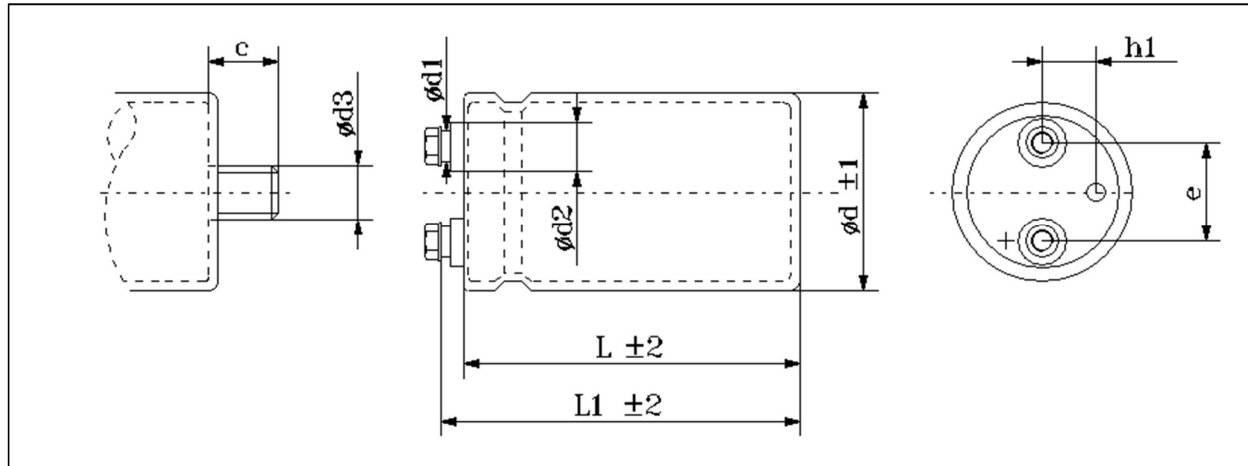Dimension, Quantity and Weight for box


Case				Connections							Mounting Stud			Packaging	
Code	DxL	L1	h1	d1	d2	e	Terminal	Screw			Screw			Pcs/Box	Weight/box
							Code	Thread	Torque	Lenght	d3	c	Torque		
BB	51x83	85	13	8	13	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
BB	51x83	85	13	13	18	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
BC	51x105	109	13	8	13	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
BC	51x105	109	13	13	18	22.2	X	M5	2,0	10	M12	16	10Nm	30	6-9
CC	63x105	111	16	8	13	28.6	X	M5	2,0	10	M12	16	10Nm	20	6-8
CC	63x105	111	16	13	18	28.6	X	M5	2,0	10	M12	16	10Nm	20	6-8
DC	76x105	111	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	12	5-7
DF	76x145	151	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	12	6-14
				18	23		G	M6	2,5						
DK	76x165	173	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	12	6-14
				18	23		G	M6	2,5						
DJ	76x222	222	19	13	18	31.8	X	M5	2,0	10	M12	16	10Nm	8	9-11
				18	23		G	M6	2,5						
EC	90x105	112	19	18	23	31.8	G	M6	2,5	10	M12	16	10Nm	6	7-9
EF	90x145	153	19	18	23	31.8	G	M6	2,5	10	M12	16	10Nm	6	9-11
EJ	90x222	227	19	18	23	31.8	G	M6	2,5	10	M12	16	10Nm	6	8-12

All dimensions in mm, torque in Nm, weight in kg

